Tiandy

TC-C38WS Spec:I5/E/Y/M/2.8mm/V4.0

8MP Fixed Starlight IR Bullet Camera

Lite Series



KEY FEATURES

- Metal Housing
- Up to 3840x2160@20fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.002Lux@F1.6
- 120dB WDR
- Smart IR, IR Range: 50m
- Support tripwire and perimeter
- Built-in Mic, support max 512G Micro SD Card
- Operating Conditions -40°C~65°C, 0~95% RH
- DC12V,POE
- IP67

Tiandy

SPECIFICATIONS

Camera	
Image Sensor	1/2.8"CMOS
Min. Illumination	Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s-1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	120dB
S/N	>42dB
Angle Adjustment	0-360°;0-75°;0-360°
Lens	
Lens Type	Fixed
Focal Length	2.8mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	105.3°(H);56.9°(V);119.7°(D)
DORI Distance	Detect:77m Observe:30.5m Recognize:15.5m Identify:7.5m
Illuminator	
IR LEDs	2
IR Distance	50m
Wavelength	850nm
White LEDs	N/A
Whitelight Distance	N/A
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32k-16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz

Tiandy


Image	
Max. Resolution	3840x2160@20fps
Main Stream	PAL:20fps(3840x2160,3072×2048),25fps(2560x1440,2304x1296,1920x1080,1280x720) NTSC:20fps(3840x2160,3072×2048),30fps(2560x1440,2304x1296,1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	PAL:25fps(704x576,704x288,352x288,640x480) NTSC:30fps(704x480,704x240,352x240,640x360)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance
ROI	8 regions
Corridor mode	Yes
EIS	N/A
OSD	5regions;16*16/32*32/48*48/64*64/96*96
Picture Overlay	1 region
Privacy Mask	4 regions
Defog	Yes
Feature	
Alarm Trigger	Motion Detection;Mask Alarm;Voltage Alarm;Disk Full;Disk R/W Error;IP Address Conflict;MAC Address Conflict;FTP Server Exception
Linkage Method	send email;trigger recording;trigger capture;notify surveillance center
Video Analytics	Human/Vehicle Classification;Tripwire;Perimeter


Tiandy

Rules of behavior analyse in 1 scene	8
Early Warning(EW)	N/A
Auto-Tracking	N/A
Face Mode	N/A
Face Detection Performance	N/A
Network	
ANR	ANR
Protocols	HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;IGMP;SNMP;DHCP;DNS;DDNS;Easy DDNS;NTP;SMTP;SSL;802.1X;QoS;IPv4;IPv6;PPPOE;SSH;Unicast;Multicast;RTCP;ARP;SRTP;RTSP;FTP;SFTP;NAS
System Compatibility	onvif Profile S/T/G;CGI;MIL STONE;RTMP
Remote Connection	⩽2
Client	Easy7 Smart Client
Moblie Client	EasyLive Plus
Web	IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Mic	Yes
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Built-in Micro SD card slot, up to 512 GB
Additional interfaces	N/A
General	
Web Client Language	19languages Simple Chinese/Traditional Chinese/English/Spanish/Korean/Italian/Turkish/Russian/Thai/French/Polish/Dutch/Hebrew/Arabic/Vietnamese/German/Ukrainian/Portuguese/Albanian
Operating Temperature	-40°C-65°C
Operating Humidity	0-95%
Storage Temperature	-40°C-65°C
Storage Humidity	0-95%(non-condensing)
Power Supply	DC12V±25%,MAX 6.5W;POE 802.3af,MAX 8W
Protection	Surge protection 2000V;Lightning proof 6000V;IP67
Boundary Dimensions	160(L)73(W)73(H)mm
Package Dimensions	215(L)95(W)120(H)mm
GrossWeight	0.65kg
NetWeight	0.52kg

Tiandy

DIMENSIONS (Unit: mm)

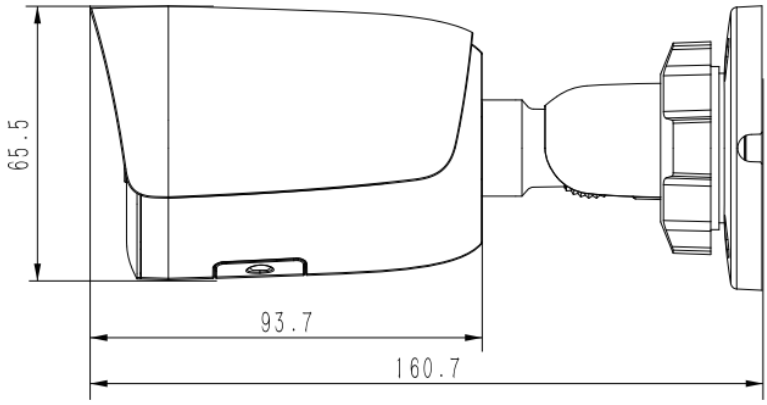

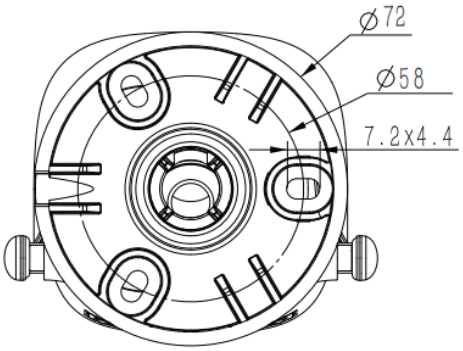

ACCESSORIES



TC-P54BM Spec:V5



A36_V5.0

Tiandy

TC-R3110 Spec: I/B/P8/K/V3.1

H.265 1HDD 10ch PSE NVR

Lite-K Series



KEY FEATURES

HD Input
- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Support live view, storage, and playback of the connected camera at up to 8MP resolution

HD Output
- 1×HDMI and 1×VGA simultaneous outputs
- HDMI Video output at up to 4K resolution

HD Storage
- 1 SATA interface, up to 10TB for 1 HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission
- 1×RJ45 self-adaptive 10/100 Mbps network interface
- PoE Port: 8×RJ45 self-adaptive 10/100 Mbps network interfaces

Various Applications
- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- Connectable to smart IP cameras from Tiandy and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade

Tiandy

SPECIFICATIONS


Input	
Video Input	10-ch
Max Resolution	8MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 80Mbps; Outgoing 80Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840x2160, 1920×1080, 1280×720, 1024×768, 1366×768, 1440×900, 1280×800 VGA 1-ch, 1920×1080, 1280×720, 1024×768, 1366×768, 1440×900, 1280×800
Screen Split	1/3/4/5/6/7/8/9/10
Audio Output	1×RCA
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	2×8MP, 2×6MP, 3×5MP, 4×4MP, 5×3MP, 8×1080P, 10×720P, 10×4CIF
Synchronous Playback	2×8MP, 2×6MP, 3×5MP, 4×4MP, 5×3MP, 8×1080P
Records Encryption	Yes
Hard Disk	
SATA	1 SATA interface for 1 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	N/A
External Interface	
Network Interface	1×RJ45 self-adaptive 10/100 Mbps network interface
USB Interface	2×USB 2.0
Serial Interface	N/A
Alarm In/Out	4/1
Network	
Protocol	HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, DHCP, DNS, DDNS, EasyDDNS, NTP, SMTP, SSL, QoS, IPv4, IPv6, IP Filter, Telnet, SSH, RTSP, RTP, RTCP, ARP, SNMP(v1), PPPOE
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P
POE	
POE Interface	8×RJ45 self-adaptive 10/100 Mbps network interface
Power per POE Port	30W(IEEE802.3af/at)
Max Current per POE Port	600mA
General	
Web Version	Web6
Language	Simplified Chinese, Traditional Chinese, English, Spanish, Italian, Korean, Turkish, Russian, Thai, French, Hebrew, Polish, Dutch, Arabic, Vietnamese, German, Ukrainian
Operating Conditions	-10～55℃, 10%~90% RH
Power Supply	DC48V, 1.875A
Consumption (without HDD)	≤20W
Chassis	1U
Dimensions	44×255×231mm, (1.78×10.04×9.09 inch)
Weight (without HDD)	1Kg (2.2lb)

Tiandy


AVAILABLE MODEL

TC-R3110 SPEC: I/B/P8/K/V3.1

DIMENSIONS (Unit: mm)

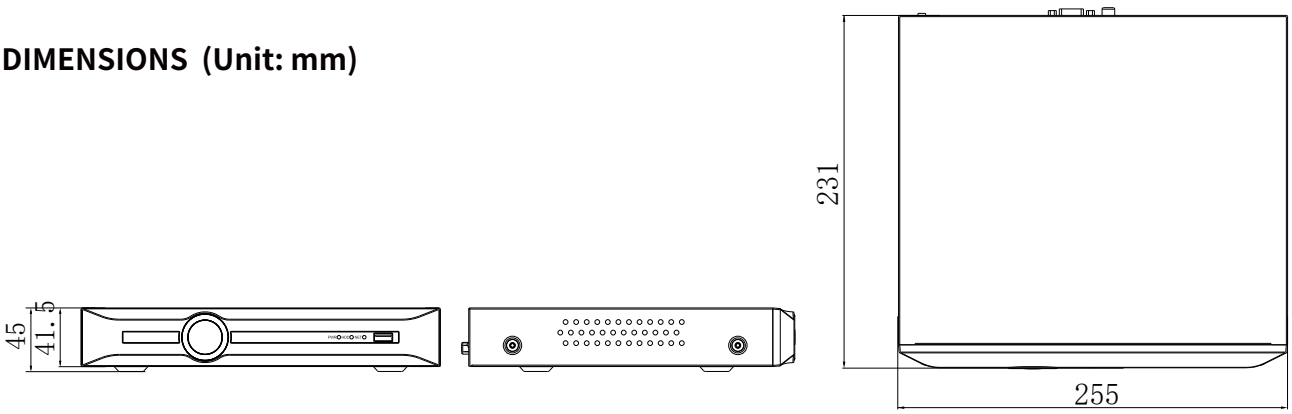

Physical Interfaces

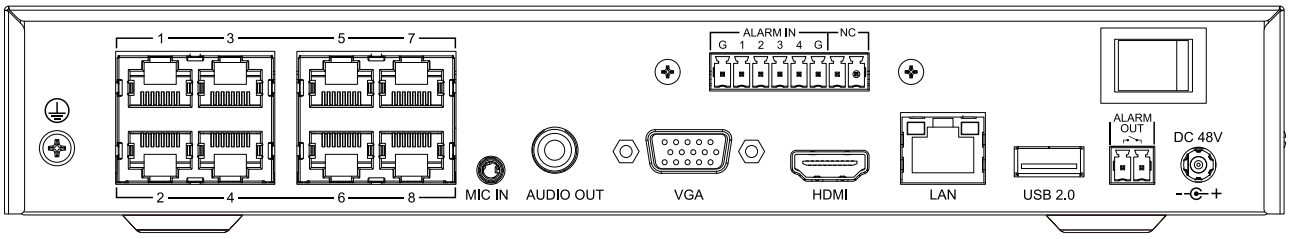

DISTRIBUTED BY